



ADVANCED BLIND SPOT SENSOR SYSTEM

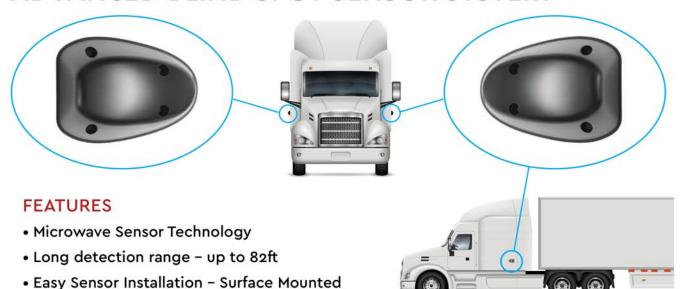

COMPETITION


Sensors mounted in rear corners

• Visual alerts mount in A-Pillar

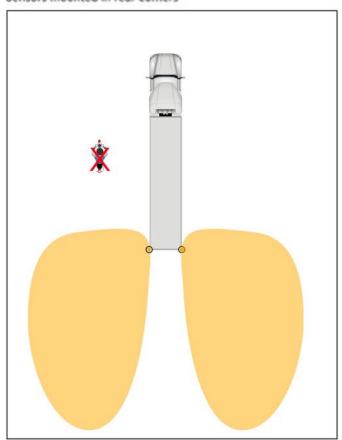

THE FLEETMASTER DIFFERENCE

Our sensors are mounted in the front of the vehicle

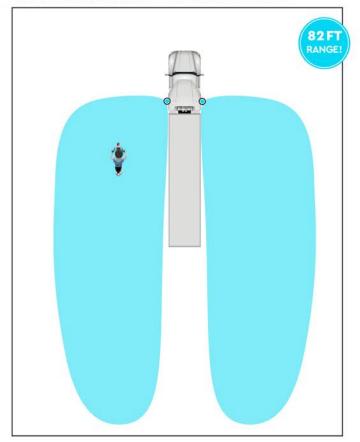




ADVANCED BLIND SPOT SENSOR SYSTEM

SPECIFICATIONS

Operating Frequency	24.0-24.25GHz	
Transmitting Power	15dBm	**************************************
Detection Angle	40 Degree	
Speed Range	0.35mph-137mph	
Speed Accuracy	< 0.35mph	
Movement Detection	approached or overtaken by vehicle	
Detection Range	0-82ft	
Operating Voltage	9-32V	
Rated Current	<200mA	
Working Temperature	-40°C ~ +80°C	
Waterproof Radar Sensor	IP67	







IN THE BOX

1 x Control Module

1 x Cable Harness

2 x Blind Spot Sensors

2 x Sensor Extension Cables

2 x LED Indicators

2 x LED Extensions Cables

1 x GPS Connector

1 x Speaker

2 x 3M Mounting Tapes